




GLOW IN
THE DARK

PRO-FLOOR® GLO

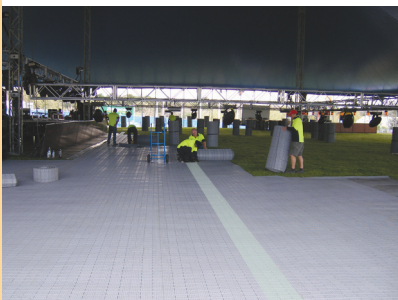

Illuminate pathways and
highlight designated areas

PROFLOOR
PORTABLE FLOORING

MANUFACTURER
SALES
HIRE



E: info@profloor.com.au
W: www.profloor.com.au

- Stadiums
- Pathways
- Major events
- Circus
- Festivals

EXHIBITIONS




SEAT ROWS




FESTIVALS



MAJOR EVENTS

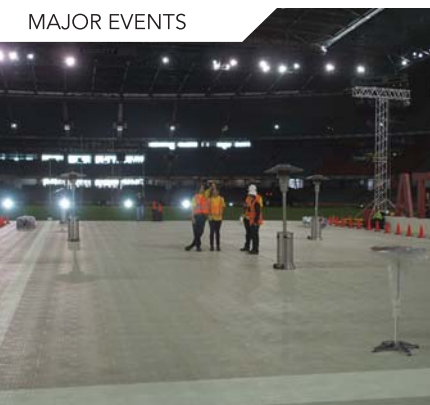

CONCERTS

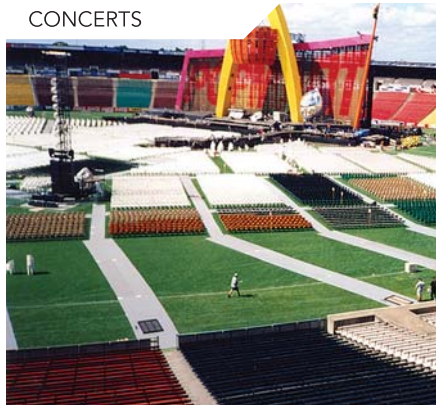

FEATURES

- Glows for up to 4 hours
- Integrates with PRO-FLOOR® EF, GP or MR
- No power connection required
- Can be clipped in after main floor assembly
- Easy to adjust and assemble
- Easy for patrons to find way in the dark

USES

- End seat row indicators
- Highlighting exit points
- Accentuating potential hazards
- Dance floors
- Stadium pathways

INDUSTRIES

- Major events
- Concerts
- Hire & rental
- Dance and fashion events
- Circus

TECHNICAL DATA

MATERIAL	Luminous recyclable polypropylene copolymer. Specific engineering-grade material for high impact, toughness, flexibility and resilience.
UV STABILISED	Treated against excessive colour fading and deterioration.
FIRE RATING	NFP92-501 Epiradiateur Test M4. AS/NZS 1530.3-1999: Ignitibility = 15, Spread of Flame = 2, Heat Evolved = 2, Smoke Developed = 4.
WORKING TEMP	-10°C to +50°C.
TREAD SIZE	Unassembled, each tread is 310mm long, 88mm wide and 17mm high. These connect length and widthwise to form segments of any size, 39.6 assembled treads per m².
WEIGHT	Approx. 110gm per tread, 4.3kg per m².
LOAD FACTOR	Static - 29,000kg/m² on firm surface.
STORAGE	42m²/cu.m. in rolls, 56m²/cu.m. flat sections.
CLEANING	May be swept, mopped, scrubbed and pressure-washed. Resistant to most common detergents and cleaning fluids.
GRASS PROTECTION	Pro-Floor® GLO can be used for 3-7 days over natural grass surfaces, reducing damage caused by abrasion and wear. For specific grass protection, we recommend Pro-Floor® GP.
DRAINAGE	Pro-Floor® GLO has a moisture containment canopy to prevent burns from severe sunlight. Pro-Floor® GLO contains in-built grooves and slots to allow water drainage away from the surface thus reducing the risk of slipping.
USE	Pro-Floor® GLO is designed to integrate with Pro-Floor® GP, EF & MR. Individual tiles will stand out by glowing in the dark to provide a direction marker.